

FIG. 1

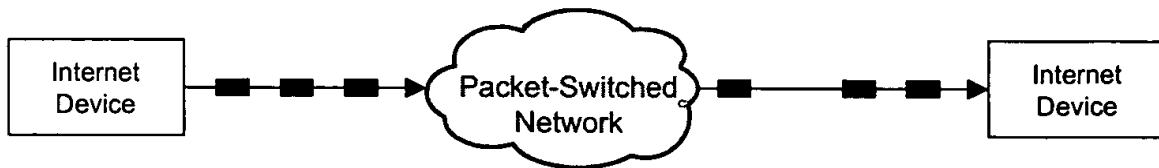


FIG. 2

PARAMETER	FIXED DELAY	VARIABLE DELAY
CODEC (G.729)	25 msec	
Packetization	Included in CODEC	
Queuing delay		Depends on uplink
Network delay	50 msec	Depends on network load
Jitter buffer	50 msec	
Total	125 msec	

FIG. 3

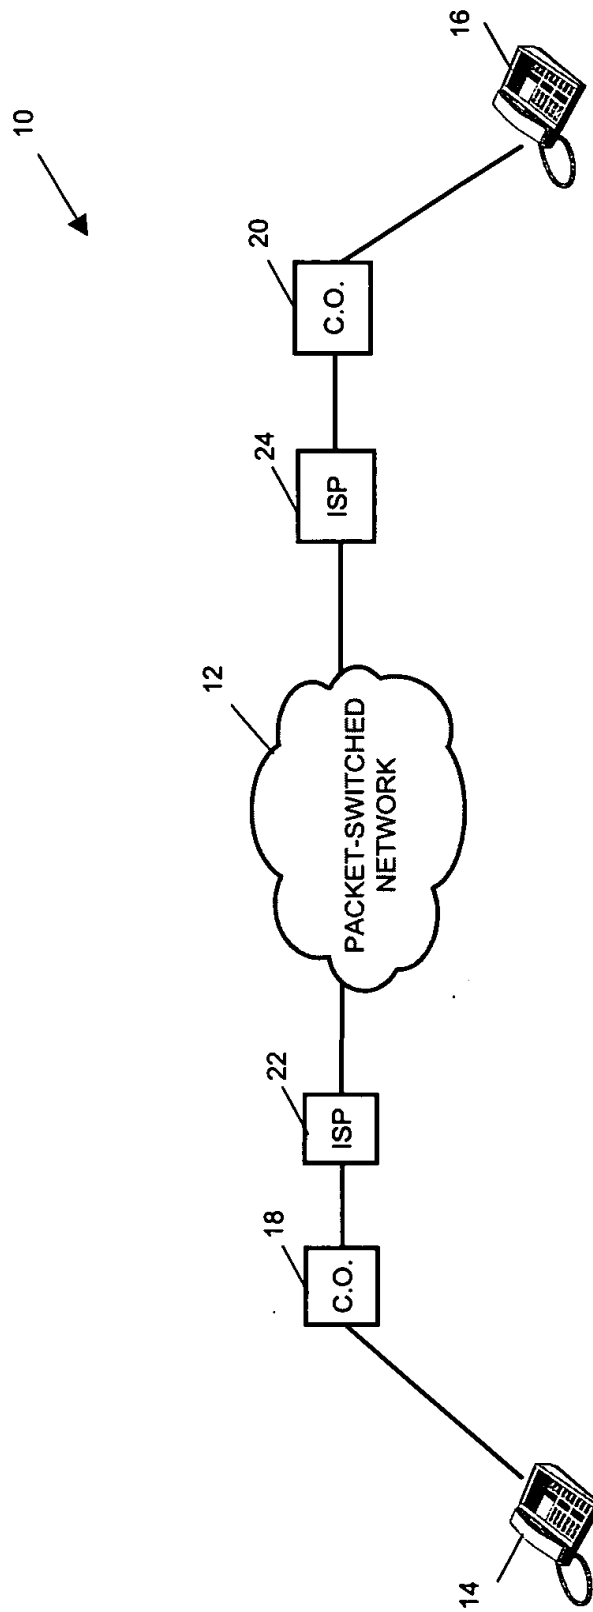


FIG. 4

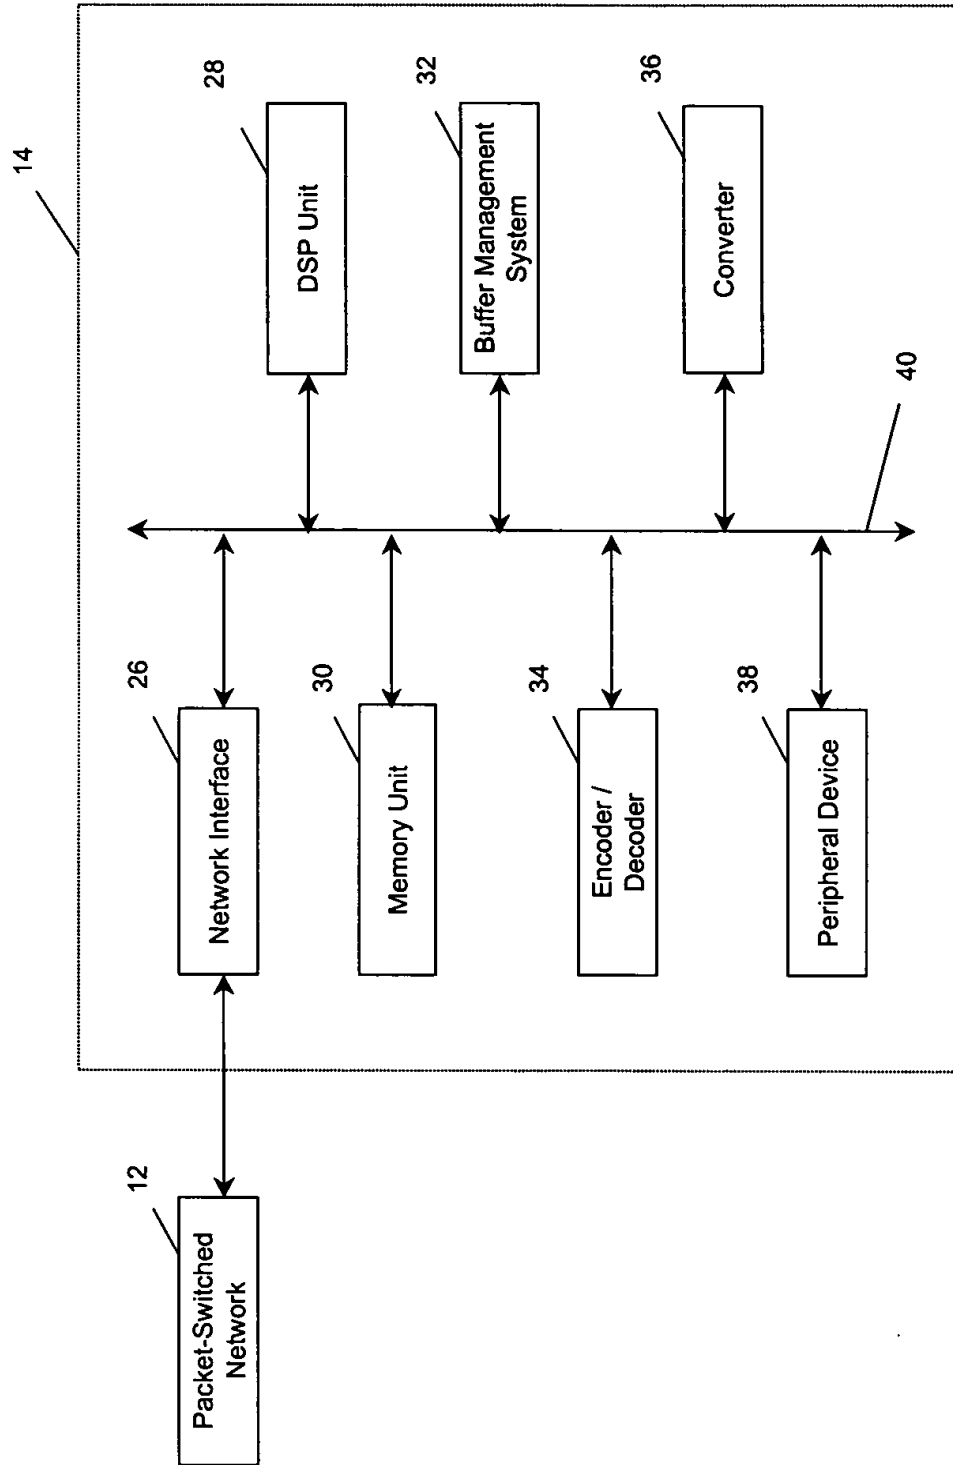


FIG. 5

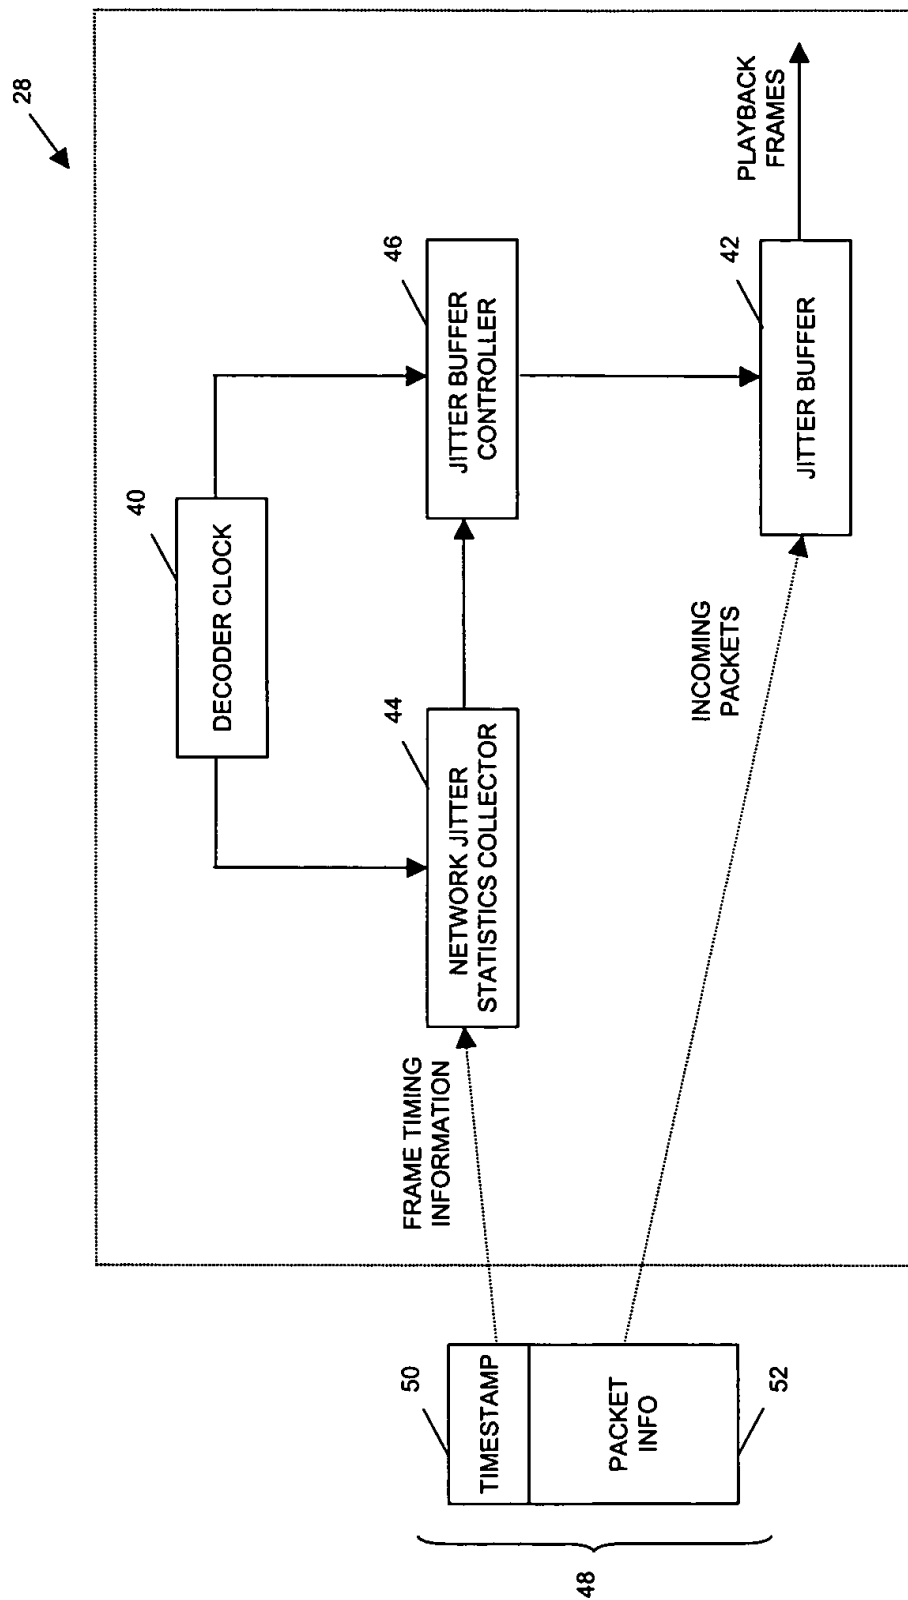


FIG. 6

RECEIVED FRAME	ARRIVAL-TIME OF FRAME	PLAYBACK-TIME OF FRAME	TIME FRAME WAS LATE (msec)
1	Time 100	Time 100	0 msec
2	Time 220	Time 130	90 msec
3	Time 160	Time 160	0 msec
4	Time 190	Time 190	0 msec
5	Time 250	Time 220	30 msec
⋮	⋮	⋮	⋮

FIG. 7

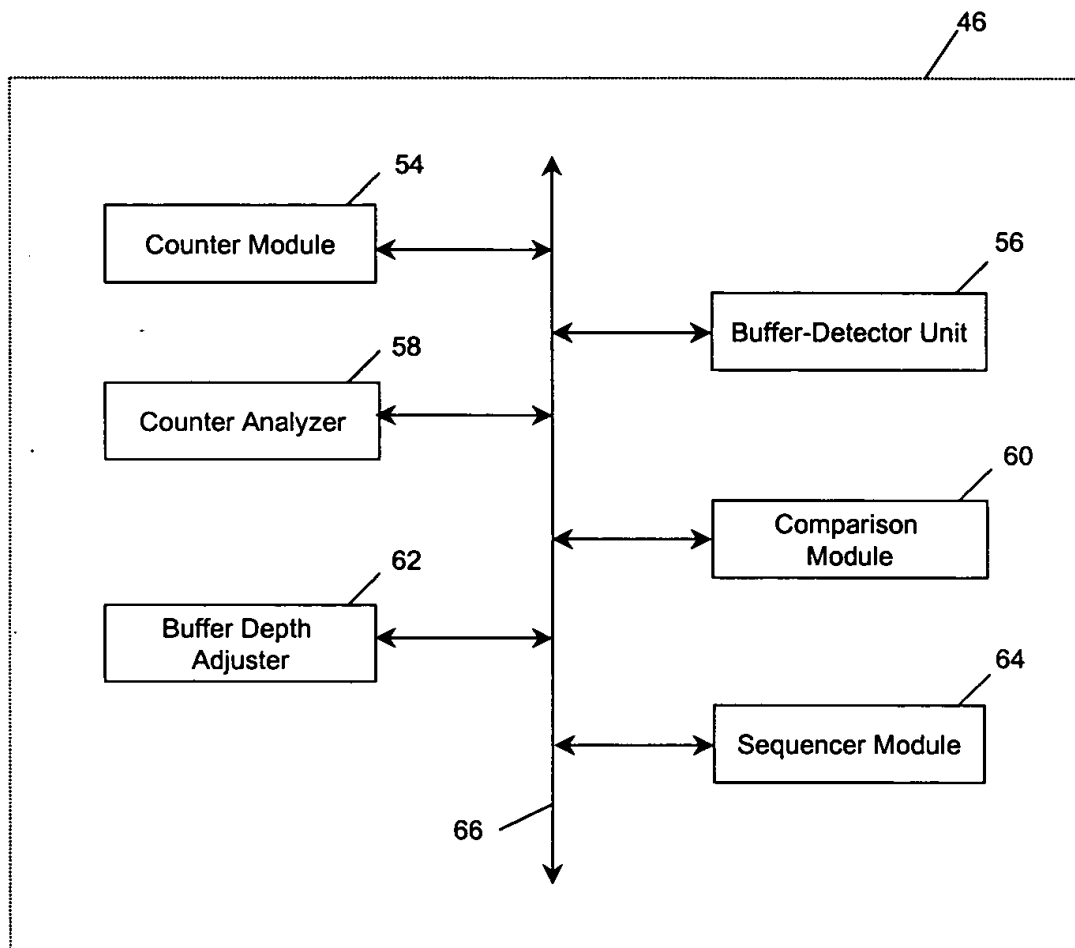


FIG. 8a

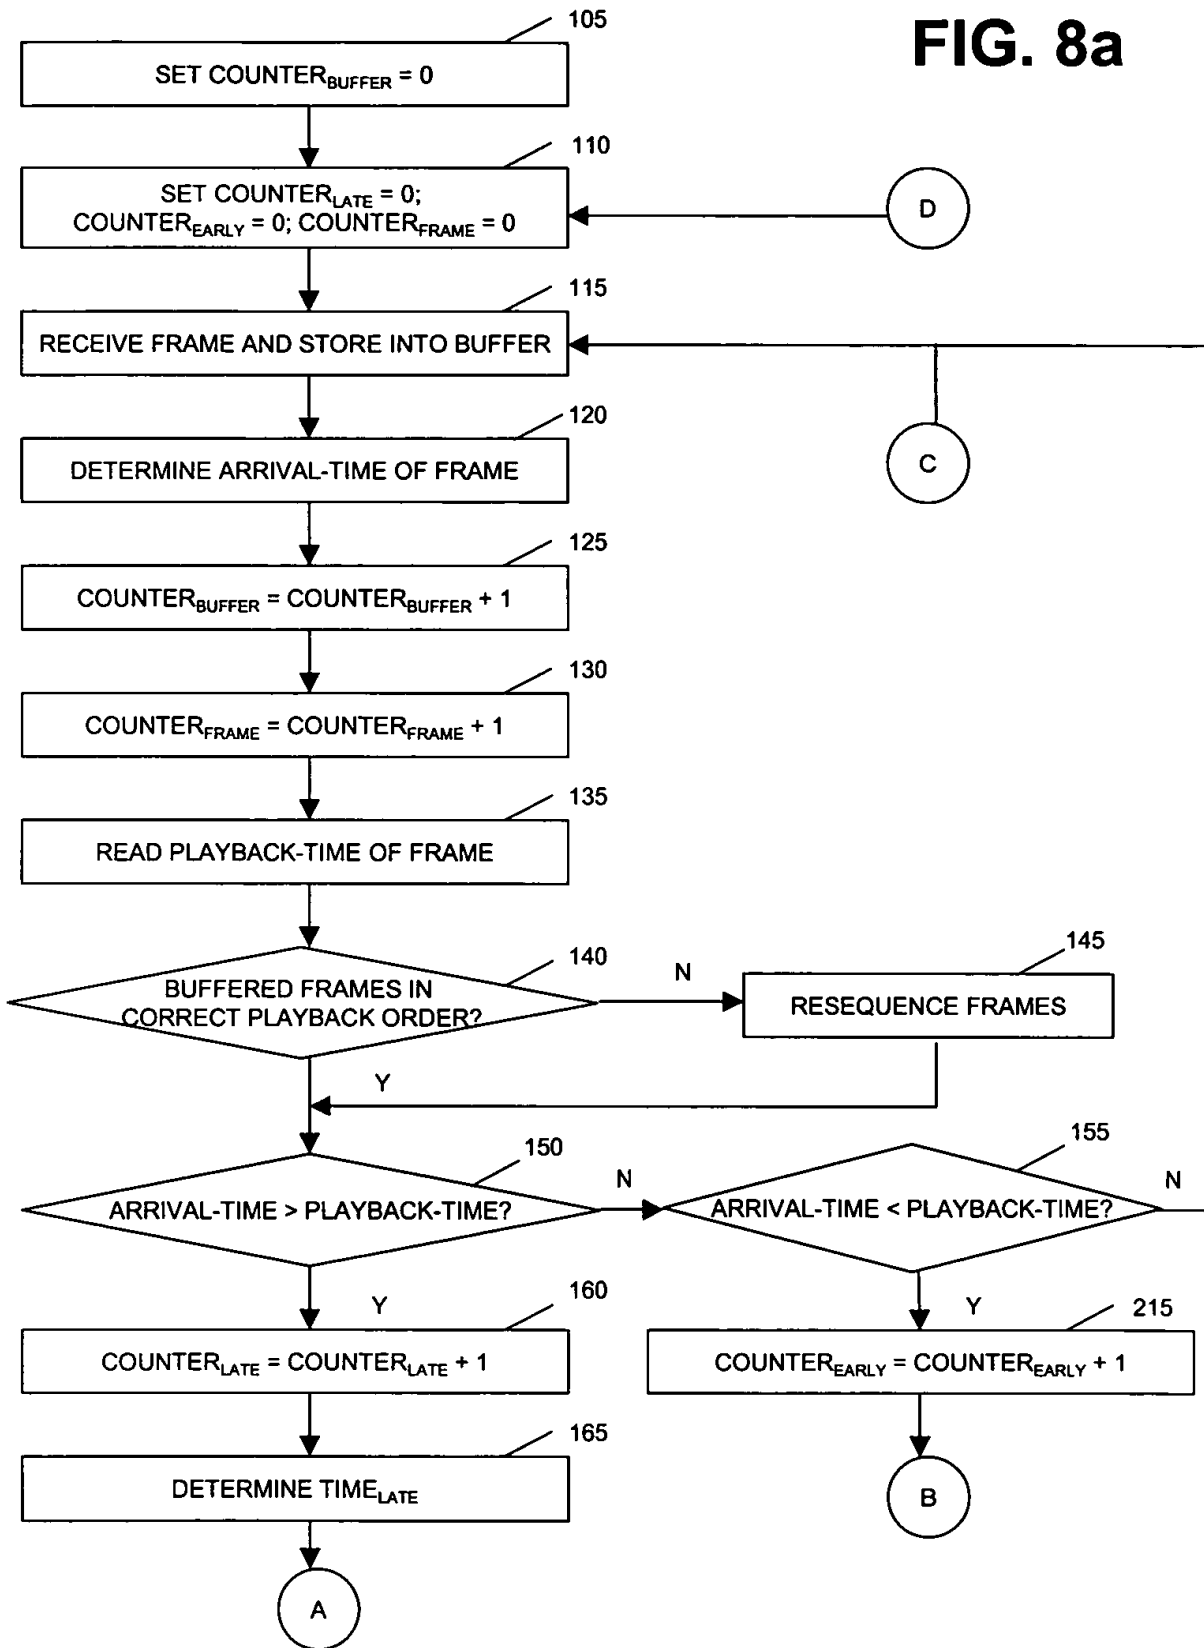


FIG. 8b

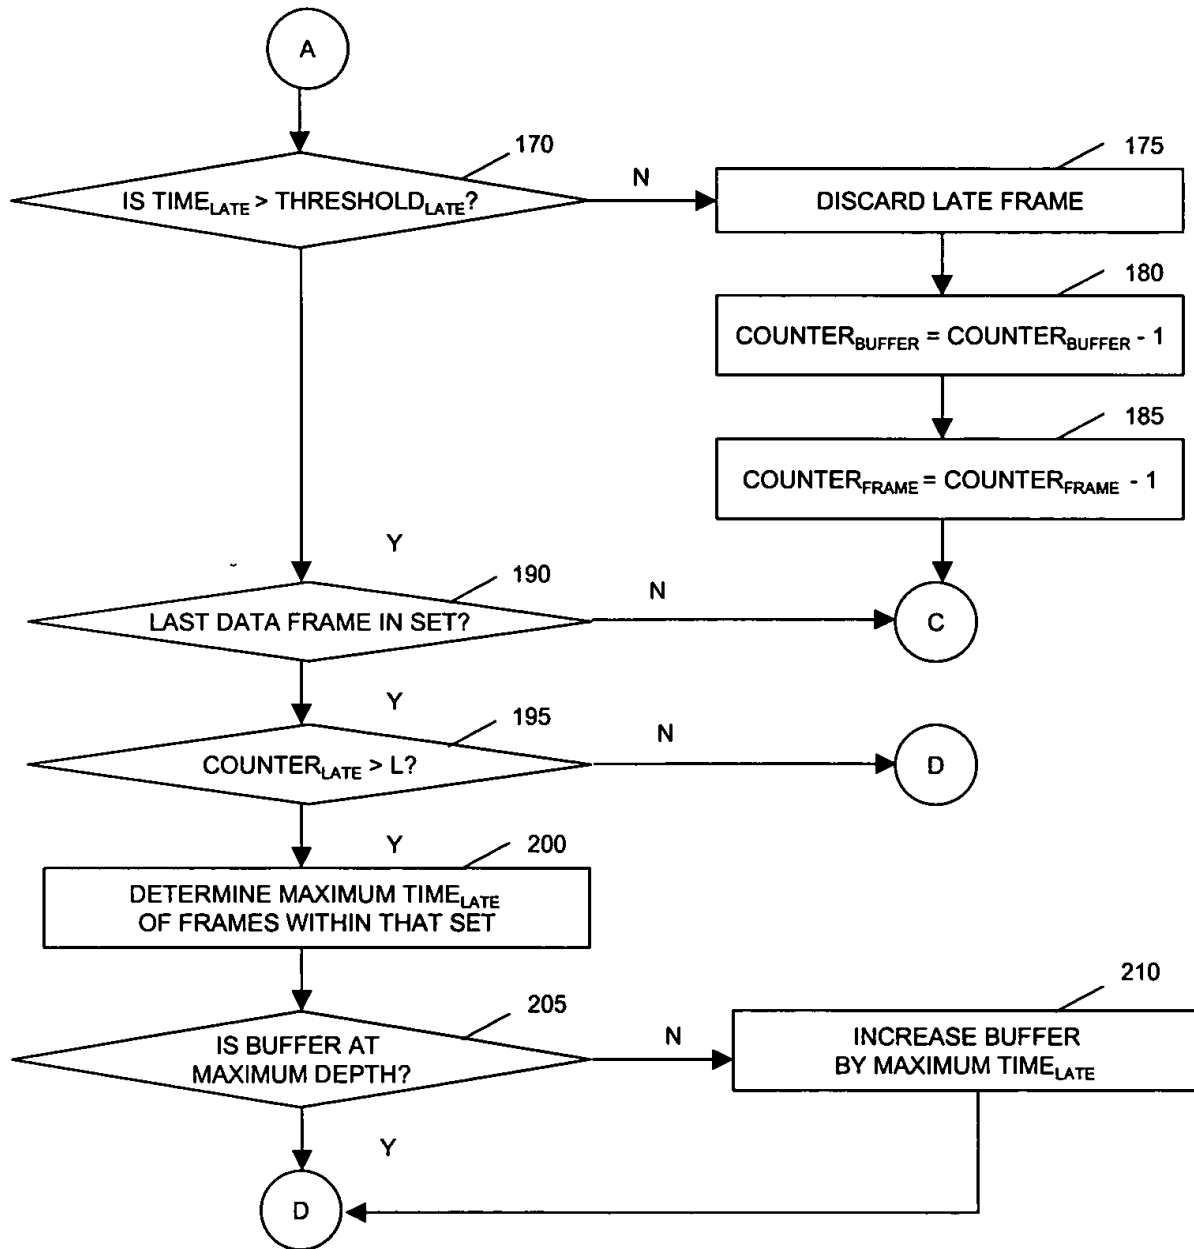


FIG. 8c

